
Toric II



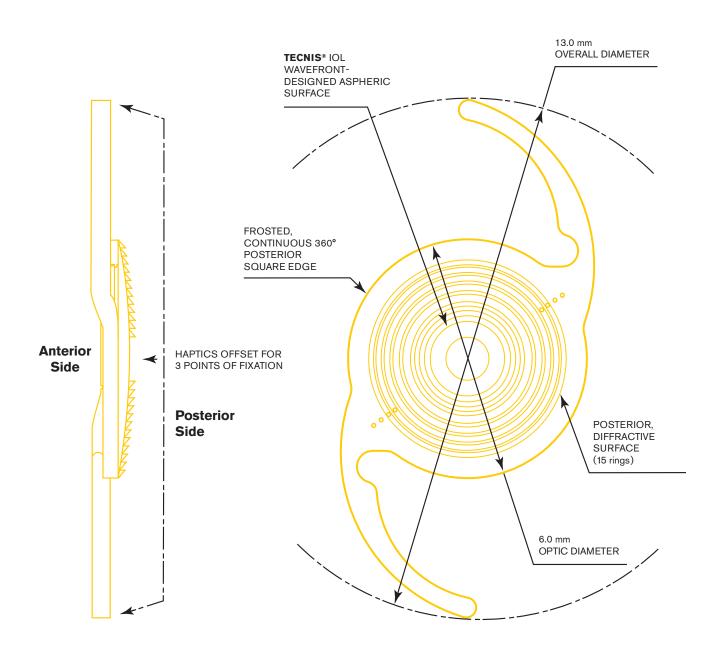

## TECNIS Synergy™ Toric II IOL

with TECNIS SIMPLICITY® Delivery System

Toric II



SE Powers:	+5.0 D to +34.0 D in 0.5 diopter increments				
Model Numbers:	DFW150	DFW225	DFW300	DFW375	
Cylinder Powers - IOL Plane	1.50 D	2.25 D	3.00 D	3.75 D	
Cylinder Powers - Corneal Plane	1.03 D	1.54 D	2.06 D	2.57 D	
Diameter:	6.0 mm				
Center Thickness:	0.7 mm (20.0 D)				
Shape:	Biconvex, wavefront-designed anterior toric aspheric surface and achromatic technology to correct chromatic aberration for enhanced contrast sensitivity.				
Material:	Soft, foldable hydrophobic acrylic with UV and violet light absorber				
Refractive Index:	1.47 at 35° C				
Edge Design:	ProTEC frosted, continuous 360° posterior square edge				
Achromatic Technology:	Proprietary technology for chromatic aberration correction				
BIOMETRY'1	CONTACT ULTRA	SOUND <sup>†</sup>	OPTICAL**		
A-constant:	118.8		119.3	119.3	
AC Depth:	5.4 mm	5.7 mm			
Surgeon Factor: <sup>2</sup>	1.68 mm		1.96 mm	1.96 mm	
HAPTIC CHARACTERISTICS <sup>1</sup>					
Overall Diameter:	13.0 mm				
Thickness:	0.46 mm				
Style:	C, TRI-FIX haptics offset from optic; 1-piece lens				
	Soft, Foldable, UV-absorbing and violet-light filtering hydrophobic acrylic				
Material:	Soft, Foldable, UV-	absorbing and viole	t-light filtering nyar	opnobic acrylic	

## Preloaded TECNIS Simplicity® Delivery System

'Values theoretically derived for a typical 22.0 D lens. Johnson & Johnson Vision recommends that surgeons personalize their

A-constant based on their surgical techniques and equipment, experience with the lens model and postoperative results.

For optimal results, utilize the TECNIS® Toric IOL calculator at wwww.TecnisToricCalc.com to determine the appropriate Toric model and power.

References: 1. TECNIS Synergy™ IOL with TECNIS Simplicity® Delivery System DFU, Z311421E. 2. Holladay JT. International Intraocular Lens & Implant Registry 2003. J Cataract Refract Surg. 2003; 29:176-197. RFF2016CT0151.

INDICATIONS an IMPORTANT SAFETY INFORMATION FOR TECNIS Synergy™ IOL with TECNIS Simplicity® Delivery System, Model DFR00V and TECNIS Synergy™ Toric II IOL with TECNIS Simplicity® Delivery System, Models DFW150, DFW225, DFW300, DFW375

RX Only

INDICATIONS: The TECNIS Simplicity® Delivery System is used to fold and assist in inserting the TECNIS Synergy™ IOL which is indicated for primary implantation for the visual correction of aphakia in adult patients, with less than 1 diopter of pre-existing corneal astigmatism, in whom a cataractous lens has been removed. The TECNIS Simplicity® Delivery System is used to fold and assist in inserting the TECNIS Synergy™ Toric II IOLs that are indicated for primary implantation for the visual correction of aphakia and for reduction of refractive astigmatism in adult patients with greater than or equal to 1 diopter of preoperative corneal astigmatism, in whom a cataractous lens has been removed. Compared to an aspheric monofocal lens, the TECNIS Synergy™ IOLs mitigate the effects of presbyopia by providing improved visual acuity at intermediate and near distances to reduce eyeglass wear, while maintaining comparable distance visual acuity. The lens is intended for capsular bag placement only. WARNINGS: Intraocular lenses may exacerbate an existing condition, may interfere with diagnosis or treatment of a condition or may pose an unreasonable risk to the eyesight of patients. Patients should have well-defined visual needs and be informed of possible visual effects (such as a perception of halo, starburst or glare around lights), which may be expected in nighttime or poor visibility conditions. Patients may perceive these visual effects as bothersome, which, on rare occasions, may be significant enough for the patient to request removal of the IOL. The physician should carefully weigh the potential risks and benefits for each patient. Patients with a predicted postoperative residual astigmatism greater than 1.0 diopter, with or without a toric lens, may not fully benefit in terms of reducing spectacle wear. Rotation of the TECNIS Synergy™ Toric II IOL from its intended axis can reduce its astigmatic correction. Misalignment greater than 1.0 to greater than 1.0 to greater than 1.0 to greater than 1.0 to greater than



<sup>&</sup>lt;sup>†</sup>IOL constants have been theoretically derived for contact ultrasound.

<sup>&</sup>lt;sup>++</sup>IOL constants have been derived from clinical evaluation results of the 1-Piece IOL Platform.